


Securmax HeavyDuty DSM
Sicherheitskupplung freischaltend

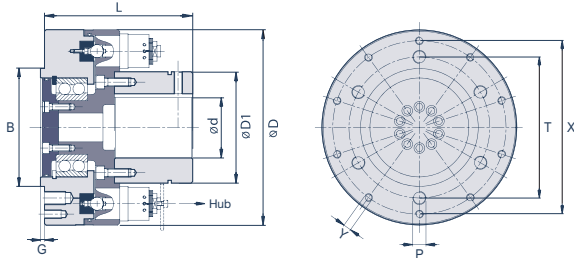

Spezifikationen

Modell	TK Nm			Abmessungen									Hub*	d max mm	max. rpm min ⁻¹
	3 MD	6 MD	9 MD	D mm	D1 mm	B	P	L mm	T	X	Y				
0	200-1.200	400-2.400	-	237	135	140	6xM16	190	170	210	10xM10	4	90	3.000	
1	325-1.400	650-2.800	975-4.200	270	165	175	6xM18	220	205	245	10xM12	4	110	3.000	
2	700-3.000	1.400-6.000	2.100-9.500	350	215	220	6xM20	300	260	310	10xM14	5,5	140	3.000	

*Hub zum Ausrasten

Bestellbeispiel: DSM1 6 MD ø90

Drehmomentbegrenzer Größe 1, einstellbarer Drehmomentbereich 650 bis 2.800 Nm,
Bohrung 90 mm



„kurz & knapp ...
erklärt“

UNSERE PIKTOGRAMME



Lasthaltend



Lasttrennend



Spielfrei



360° wiedereinrastend



Feinstes Ansprechverhalten



Für Dauerrutschen geeignet



Verlagerungsausgleichend



Schwingungsdämpfend



Freischaltend



Durchrastend