


## Torqmax Compatto MWSP

Con pezzi a montaggio radiale | Acciaio brunito, Acciaio inox

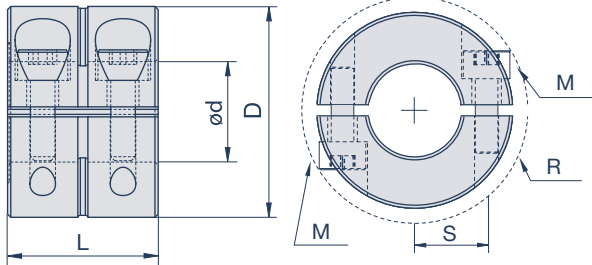

### Dati tecnici

Codice Prodotto		d	D	L	S	R	M
Acciaio brunito	Acciaio inox 1.4305	mm	mm	mm	mm	mm	
MWSP-6-F	MWSP-6-SS	6	16	20	5,51	20,8	M3
MWSP-8-F	MWSP-8-SS	8	18	20	6,5	22,4	M3
MWSP-10-F	MWSP-10-SS	10	24	20	8,51	26,3	M3
MWSP-12-F	MWSP-12-SS	12	28	24	10,01	32	M4
MWSP-16-F	MWSP-16-SS	16	34	29	12,5	39,3	M5
MWSP-20-F	MWSP-20-SS	20	40	33	14,73	47,4	M6
MWSP-25-F	MWSP-25-SS	25	45	33	17,5	52,1	M6

M= Dimensione delle viti ISO 4762, S= Distanza asse vite, R= Ingombro  
Tolleranza dei fori: +0,050mm / +0,012mm



„breve e dolce ...  
spiegato“

I NOSTRI PITTOGRAMMI



Elevate temperature



Diversi diametri dell'albero



Montabile in spazi ridotti



Coppia trasmissibile elevata



Resistente alla corrosione



Montabile radialmente



Peso ridotto



Equilibrato