


## Clampmax QuickClamp MQCL

Aluminium, Schnellspann-Klemmring

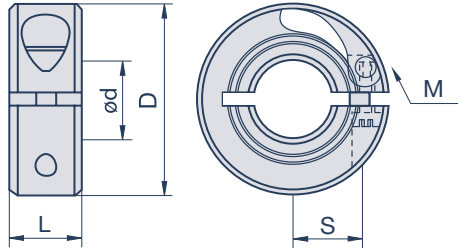

### Spezifikationen

Modell Aluminium eloxiert	d mm	D mm	L mm	M	Axiallast (N)	
					min	max
MQCL-6-A	6	38	10	M3	133	267
MQCL-8-A	8	38	10	M3	133	267
MQCL-10-A	10	38	10	M3	133	267
MQCL-12-A	12	38	10	M3	133	267
MQCL-14-A	14	38	10	M3	133	267
MQCL-15-A	15	38	10	M3	133	267
MQCL-16-A	16	38	10	M3	133	267
MQCL-20-A	20	50	13	M4	311	445
MQCL-25-A	25	50	13	M4	311	445
MQCL-28-A	28	50	13	M4	311	445
MQCL-30-A	30	50	13	M4	311	445
MQCL-32-A	32	75	15	M5	467	534
MQCL-35-A	35	75	15	M5	467	534
MQCL-38-A	38	75	15	M5	467	534
MQCL-40-A	40	100	19	M6	556	867
MQCL-42-A	42	100	19	M6	556	867
MQCL-45-A	45	100	19	M6	556	867
MQCL-48-A	48	100	19	M6	556	867
MQCL-50-A	50	100	19	M6	556	867
MQCL-54-A	54	120	19	M6	890	1379
MQCL-55-A	55	120	19	M6	890	1379
MQCL-60-A	60	120	19	M6	890	1379
MQCL-65-A	65	120	19	M6	890	1379
MQCL-70-A	70	120	19	M6	890	1379
MQCL-75-A	75	120	19	M6	890	1379

Bohrungstoleranz: +0,050mm / +0,012mm



„kurz & knapp ...  
erklärt“

UNSERE PIKTOGRAMME



Verschiedene Materialien



Radial montierbar



Schwerlastanwendungen



Für große Wellendurchmesser



Werkzeugfrei montierbar